UHF Sticker Tags

Tag Installation Sheet
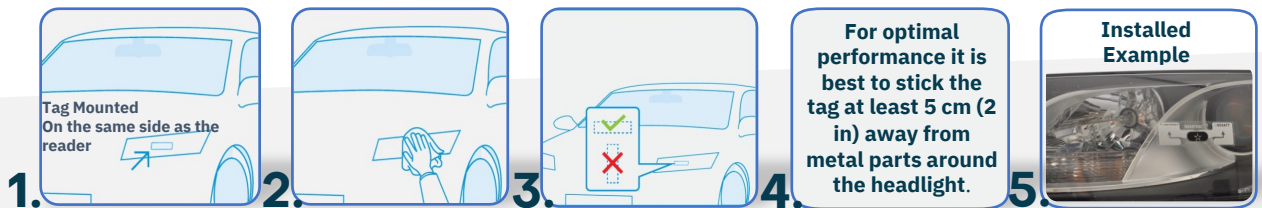
uPASS Target Non Polarized

uPASS Reach Horizontally Polarized

For optimal performance, it is important that there are no obstacles between the line of sight of the reader and tag when within read range.
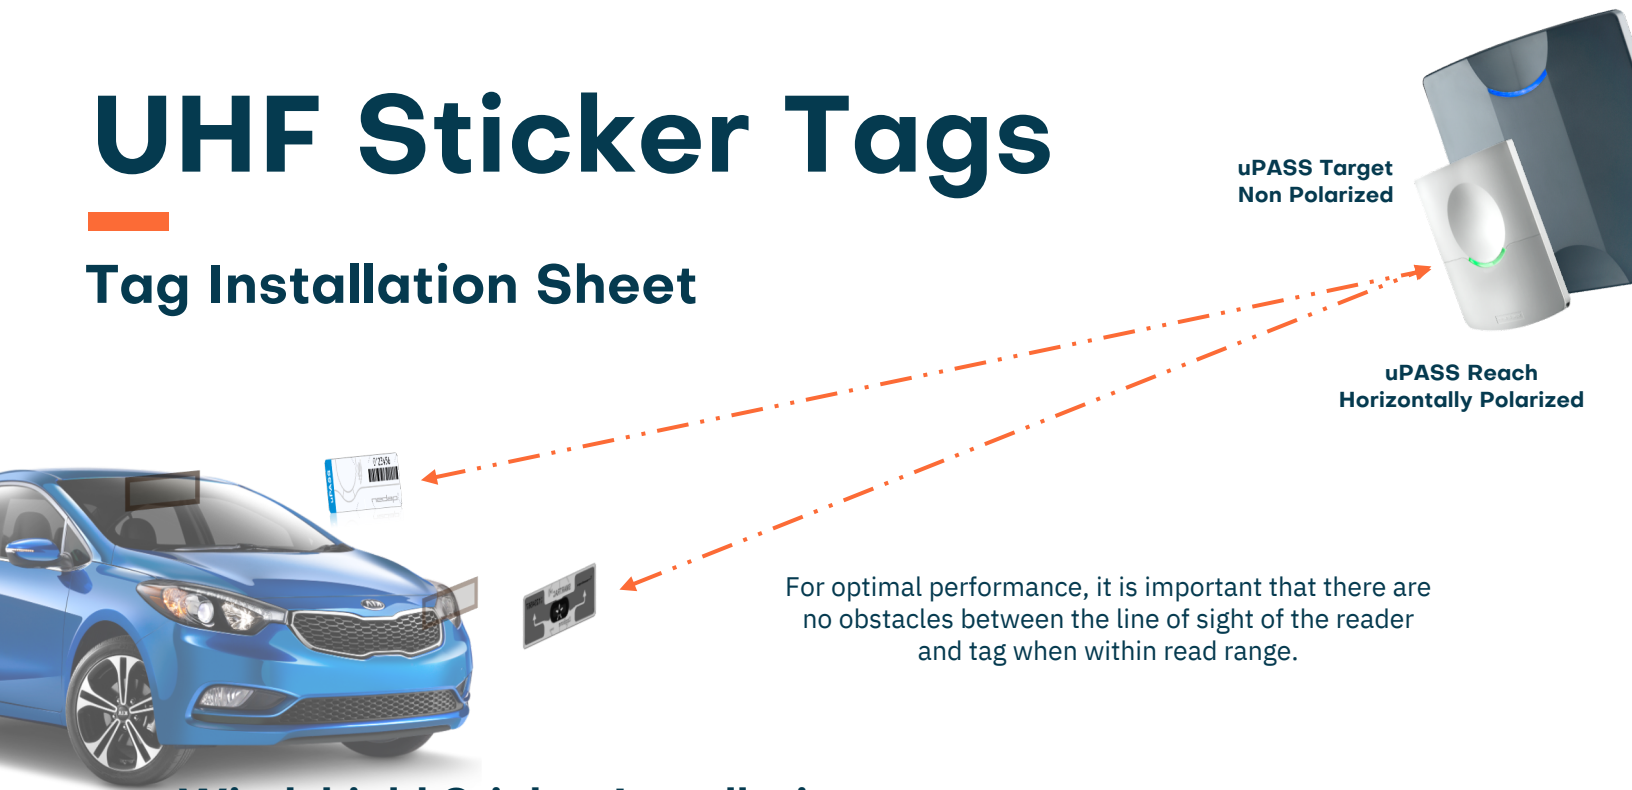
Windshield Sticker Installation

1. Tag Mounted On the same side as the reader

2.

3.

4.

5. uPASS

1. Determine the best placement location of tag. Best area of application is on the inside of the windshield in the middle, around the rearview mirror as there is a break in metalized content in this area in most vehicles.* Be sure to mount the tag on the same side of the windshield as the installed reader.

   *In some instances, higher end vehicles or tinted windshields have metalized content in the area of recommended application. If this is the case, the external tag is the best alternative.

2. Clean the surface of desired application area. Test to see if the tag is detected in this area before removing the protection layer. This is done by using scotch tape to temporarily affix the tag to the windshield.
3. If read is achieved, remove the protection layer. Avoid touching the adhesive side as much as possible.
4. Place tag horizontally in the installation area.
5. You are read to go!

Exterior Sticker Installation

1. Tag Mounted On the same side as the reader

2.

3.

4. For optimal performance it is best to stick the tag at least 5 cm (2 in) away from metal parts around the headlight.

5. Installed Example

1. Determine the best placement location of the tag. Best area of application is mounting the tag on the headlight* of the same side of the vehicle as the installed reader.

   *Some customers have had success placing their External Tags on other non-metal surfaces (side view mirror, etc.). Always test 1st.

2. Clean the surface of desired application area. Test to see is the tag is detected in this area before removing the protection layer. This is done by using scotch tape to temporarily affix the tag to the desired location. Follow all local compliances and avoid covering the headlamp's bulb.
3. If desired result is achieved, remove protection layer. Avoid touching the adhesive side as much as possible.
4. Place tag horizontally in the installation area.
5. You are ready to go!

nedap